




## Dimension drawing

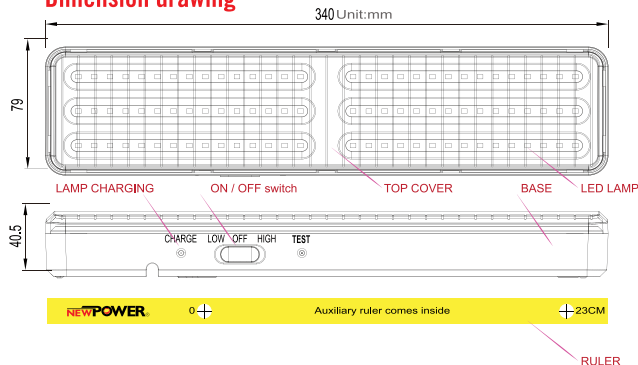

## Technical data

## GENERAL

Device category	Emergency light
Work Mode	High and low—on/off—Non maintain
Conformity	CB

## ATTACHMENT

Installation type	Wall Mounting
-------------------	---------------

## HOUSING

Dimensions	Length 340 mm x Width 40.5 mm x Height/ Depth 79 mm
Weight	573 g
Material	PC
Protection type	IP20
Permissible ambient temperature	0 °C...40 °C
Colour	white

## ELECTRICAL VERSION



Protection class	II
Nominal voltage	220-240V,50/60Hz

## LIGHT

Switch Mode	Switch/test button
Runtime	H: 2 H L: 4.5H
Luminous flux	H: 270lm L: 110lm
Colour temperature	6500k Ra 70
LED	SMD 2835(90pcs)

## EMERGENCY LIGHTING

Viewing distance	N/A
Operation Mode	Maintained
Light duration	3 H
Emergency power	H: 3W L: 2W
Battery	Lithium 3.7V 1200mAhX2
Charging time	24H

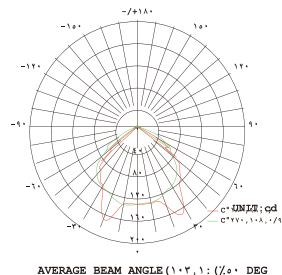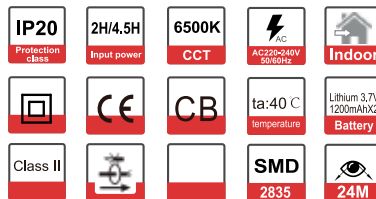

## Product description:

- Super bright&Long Lasting LEDs
- CB Approved
- High / Low level brightness adjustable
- 3 Hour Emergency Duration
- Overcharge and Over-discharge protection
- Power Cable included

## Product introduction:

This product is a portable light with charging indicator, charging protection, discharging protection, automatic conversion into emergency function if main power failure, etc. The product design meets the requirements.

## Use Guide:

1. This product use switch propulsion system: LOW OFF HIGH.
2. When not in use for a long time, please turn off the power switch.
3. Before charging, pay attention to whether the voltage is consistent with the product voltage.
4. Plug the power cord into a matching socket, if the red light is on which indicate that it is charging.
5. It is normal for the battery to feel slightly hot while charging.

## Attention:

1. Please read the user manual carefully before use.
2. Please keep the same voltage as this product before charging.
3. Please charge it in time when the light is dark, and charge it for 24 hours before initial use.
4. The product must be charged every three months if you do not use it for a long time.
5. When not using this product, please turn off all functions.
6. The best working temperature is 0~40.
7. Suitable for indoor use only.
8. If the external flexible cable or cord of this lamp damaged, it must be replaced exclusively by the manufacturer or its service agent or similarly qualified person for Avoid danger.
- 9- Only the light source on this lamp needs to be replaced by the manufacturer, its service agent or similarly qualified person.
- 10- To reduce choking hazards associated with flexible wires This luminaire must be effectively mounted to the wall if wiring in hand.
11. After the battery is fully charged, the kit can be left connected to the mains or the device can be disconnected.
12. A red LED lights up, indicating that the charger is on.

Vout contolgear: 2.8VDC

\* The switch can be set to the operating position during charging (high - low). The device will automatically light when a power outage occurs.

## Accessories

# EXIT خروج

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.



MADE IN CHINA