

## INFRARED PRESENCE SENSOR

100 W Wall Mounted

WHITE

-It is recommended to install it at a height of 3 meters.

-Easy to install.

-Electric power saver.

-Suitable for home and commercial use.

-It is used as a lighting sensor in ceilings and entrance halls.

-For switching lighting systems that depend on brightness and movement.

-For semiautomatic and fully automatic operation. Additional activation/deactivation possibility through pushbutton input.

-Detection range (for installation height of 3 m), circular, up to 6 m in diameter.

-Adaptation of the detection range possible using the included masking elements.

-With brightness-independent test mode for evaluating the detection zone.

-With detection display in test mode.

-Rated voltage: 220 V~, +10 % / -10 %

-Rated frequency: 50/60 Hz

-Suitable for: 220-240 V incandescent lamps

-Rated power: **100 W**

-Suitable for: Energy-saving bulbs

-Suitable for: Fluorescent lamps


-Temperature range (Device): 0 °C - 45 °C

-Detection angle: 120 °


-Dimensions: (L x W x D): 70 mm x 70 mm x 59 mm

-Mounting depth: 41 mm

-Mounting height: - 2 m - 4 m

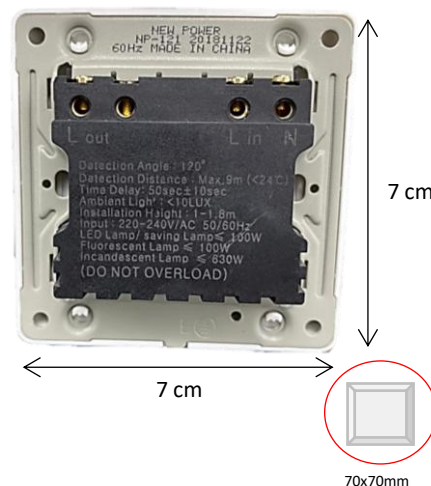

Photometric curve



UP : ☀️ 🌙 UNLIMITED

DOWN : 🌙 <10 LUX



### Areas of application

Suitable for – indoor applications

- Offices
- Corridors
- Stairways
- Residential interiors
- Commercial buildings



infrared sensor 360°



mounting height max. 4 m



max. ø 24 m



Presence Ø 7.5 m



2 - 1000 lux



IP20