


COB FORTE




7 watt

DRAWING




1. Energy Savings
2. Eco-Friendly
3. High Brightness
4. Flexible Features
5. Lights Up Instantly
6. Less Heat Dissipation
7. Shock-Resistant





8. LED Ship bridge

INSTRUCTIONS



LIGHT DISTRIBUTION CURVE

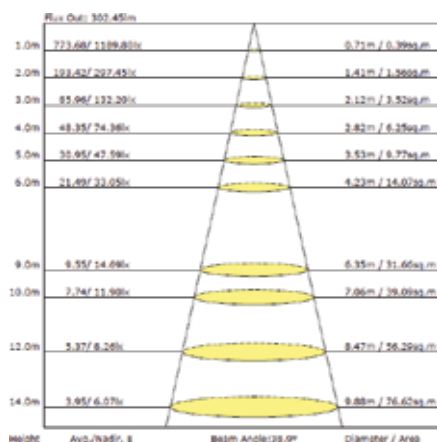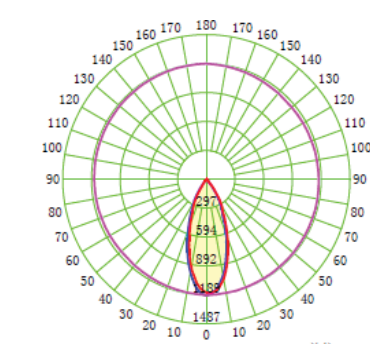

Suggested installation areas



caption

the value

Rated wattage

7 w

Rated current

0.3 A

Rated voltage

100-240 V

Line Frequency

50/60Hz

Displacement Factor

0.9

Rated lumens

560 Lm

Efficiency

80 Lm/w

Lumen Maintenance

6000 h

Beam Angle

30°

Color temperature

3000 k

Consistency sdcn

<6

CRI

>80

Rated Lifetime

30000 h

Switch cycle

15000

Ta

-10 ~ 45 °c

Safety Standard

IEC 60598

Electrical Class

II

IP rating

20

EMC

/

EMF

/

EMI

/

Cutout

65 φ

Width

88 mm

Height

55 mm

Weight

150 g

Dimming

No

Main Color of the luminaire

White

Color impact code (IK)

02