


COB FORTE



10 watt

DRAWING




1. Energy Savings
2. Eco-Friendly
3. High Brightness
4. Flexible Features
5. Lights Up Instantly
6. Less Heat Dissipation
7. Shock-Resistant




8. LED Ship bridge

INSTRUCTIONS



LIGHT DISTRIBUTION CURVE

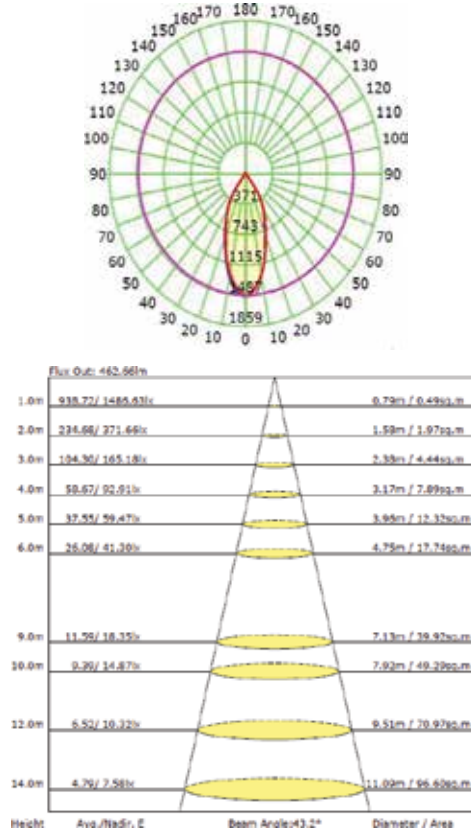

Suggested installation areas



caption

the value

Rated wattage

10 w

Rated current

0.3A

Rated voltage

100-240 V

Line Frequency

50/60Hz

Displacement Factor

0.9

Rated lumens

880 Lm

Efficiency

88 Lm/w

Lumen Maintenance

6000 h

Beam Angle

36°

Color temperature

4000 k

Consistency sdcm

<6

CRI

>80

Rated Lifetime

30000 h

Switch cycle

15000

Ta

-10 ~ 45 °c

Safety Standard

IEC 60598

Electrical Class

II

IP rating

20

EMC

/

EMF

/

EMI

/

Cutout

88 φ

Width

120 mm

Height

55 mm

Weight

250 g

Dimming

No

Main Color of the luminaire

White

Color impact code (IK)

02