


COB FORTE

15 watt



DRAWING




1. Energy Savings
2. Eco-Friendly
3. High Brightness
4. Flexible Features
5. Lights Up Instantly
6. Less Heat Dissipation
7. Shock-Resistant
8. LED Ship



bridgelux



INSTRUCTIONS



LIGHT DISTRIBUTION CURVE

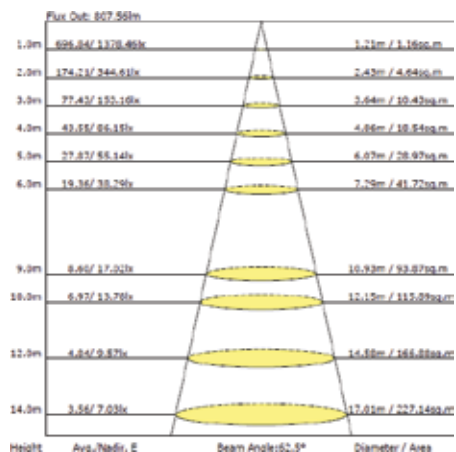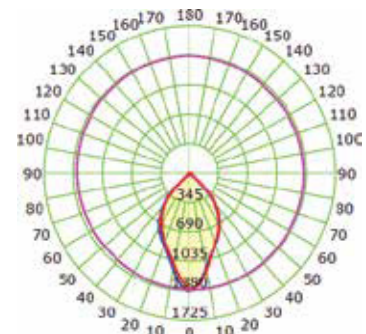

Suggested installation areas



Apartment Supermarket Retail Store Office Hotel School Hospital

caption	the value
Rated wattage	15 w
Rated current	0.375 A
Rated voltage	100-240 V
Line Frequency	50/60Hz
Displacement Factor	0.9
Rated lumens	1700 Lm
Efficiency	113 Lm/w
Lumen Maintenance	6000 h
Beam Angle	48°
Color temperature	4000 k
Consistency sdc	<6
CRI	>80
Rated Lifetime	30000 h
Switch cycle	15000
Ta	-10 ~ 45 °c
Safety Standard	IEC 60598
Electrical Class	II
IP rating	20
EMC	/
EMF	/
EMI	/
Cutout	160 φ
Width	170 mm
Height	55 mm
Weight	350 g
Dimming	No
Main Color of the luminaire	White
Color impact code (IK)	02