




4.8 wattsMD

caption	the value
Rated wattage	4.8 W
Rated current	0.03 A
Rated voltage	220-240 V
Line Frequency	50/60Hz
Displacement Factor	0.8
Rated lumens	440 Lm
Efficiency	92 Lm/w
Lumen Maintenance	6000 h
Beam Angle	100°
Color temperature	6500 k
Consistency sdcm	<6
CRI	>80
Rated Lifetime	25000 h
Switch cycle	1500
Ta	-20 ~ 40℃
Safety Standard	IEC 60598
Electrical Class	II
IP rating	20
EMC	/
EMF	/
EMI	/
Cutout	70 φ
Width	90 mm φ
Height	33 mm
Weight	240 g
Dimming	No
Main Color of the luminaire	White
Color impact code (IK)	02


- 1. Energy Savings
- 2. Eco-Friendly
- 3. High Brightness
- 4. Flexible Features
- 5. Lights Up Instantly
- 6. Less Heat Dissipation
- 7. Shock-Resistant
- 8. LED Ship



INSTRUCTIONS

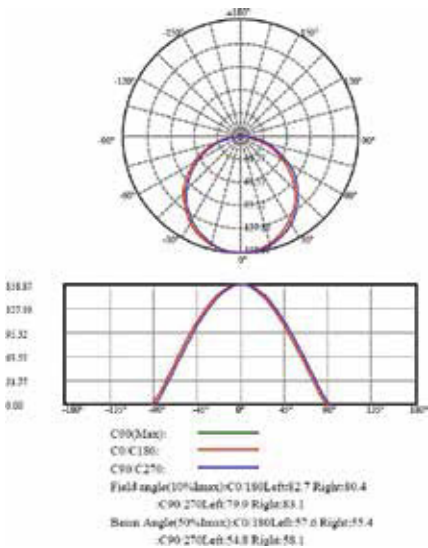

LIGHT DISTRIBUTION CURVE

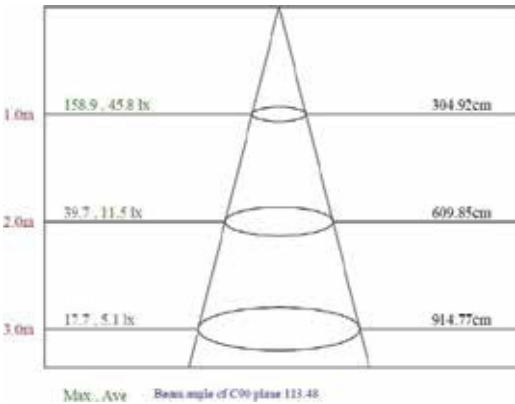

Suggested installation areas

