



4.8 watt SMD

caption	the value
Rated wattage	4.8 W
Rated current	0.03 A
Rated voltage	220-240 V
Line Frequency	50/60Hz
Displacement Factor	0.8
Rated lumens	410 Lm
Efficiency	85 Lm/w
Lumen Maintenance	6000 h
Beam Angle	100°
Color temperature	3000 k
Consistency sdcm	<6
CRI	>80
Rated Lifetime	25000 h
Switch cycle	1500
Ta	-20 ~ 40°c
Safety Standard	IEC 60598
Electrical Class	II
IP rating	20
EMC	/
EMF	/
EMI	/
Cutout	70 φ
Width	90 mm φ
Height	33 mm
Weight	240 g
Dimming	No
Main Color of the luminaire	White
Color impact code (IK)	02

1. Energy Savings

2. Eco-Friendly

3. High Brightness

4. Flexible Features

5. Lights Up Instantly


6. Less Heat Dissipation

7. Shock-Resistant


8. LED Ship
- HONGYU



INSTRUCTIONS

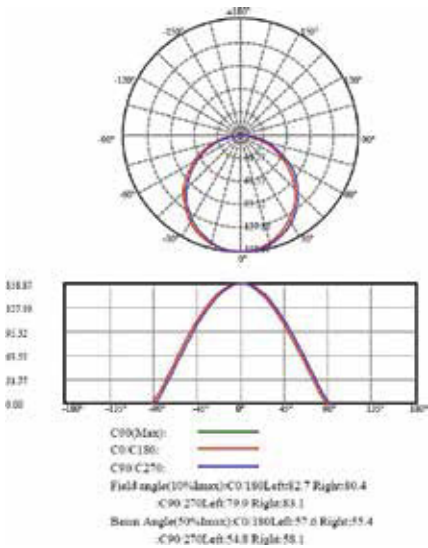

LIGHT DISTRIBUTION CURVE

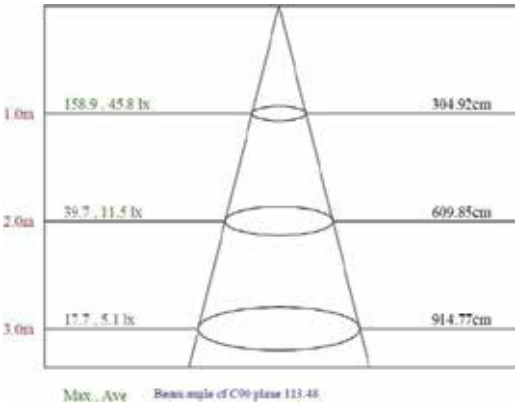

Suggested installation areas

