

24 watt SMD


caption the value

Rated wattage	24 w
Rated current	0.176 A
Rated voltage	220-240 V
Line Frequency	50/60Hz
Displacement Factor	0.8
Rated lumens	1900 Lm
Efficiency	79.1 Lm/w
Lumen Maintenance	6000 h
Beam Angle	100°
Color temperature	3000 k
Consistency sdcm	<6
CRI	>80
Rated Lifetime	25000 h
Switch cycle	2000
Ta	-20 ~ 40 °c
Safety Standard	IEC 60598
Electrical Class	II
IP rating	20
EMC	/
EMF	/
EMI	/
Cutout	200 φ
Width	225 mm
Height	38 mm
Weight	240 g
Dimming	No
Main Color of the luminaire	White
Color impact code (IK)	02


1. Energy Savings
2. Eco-Friendly
3. High Brightness
4. Flexible Features
5. Lights Up Instantly
6. Less Heat Dissipation
7. Shock-Resistant
8. LED Ship



INSTRUCTIONS

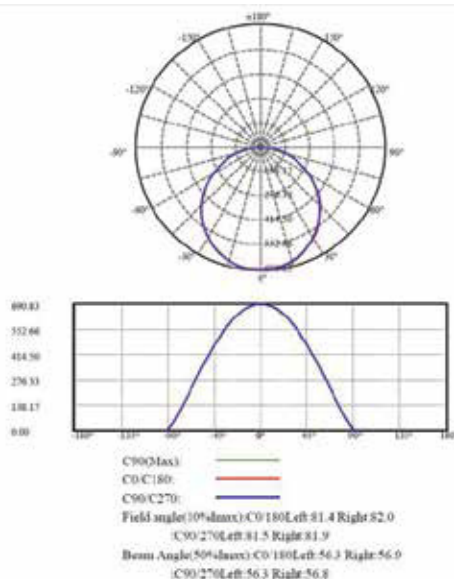

LIGHT DISTRIBUTION CURVE

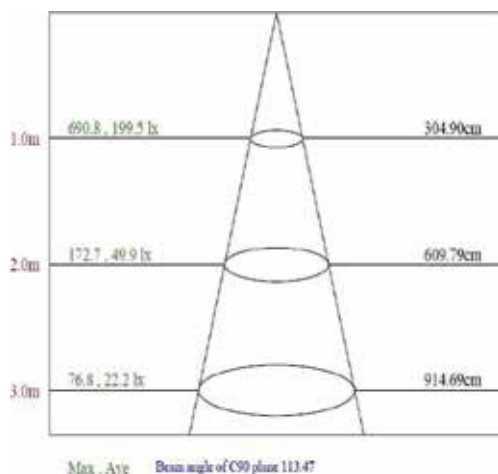

Suggested installation areas

