

LED DOWN LIGHT

Economical Class




Super protection:
It is made of very safe materials,
so it is environmentally friendly
Provides flexibility in installation
and ease of installation

LED CHIP: SANAN SMD 3030




caption	the value
Rated wattage	6 w
Rated current	0.041 A
Rated voltage	220-240 V
Power Factor	50/60 Hz
Displacement Factor	0.9
Rated lumens	450 Lm
Efficiency	75 Lm/w
Lumen Maintenance	6000 h
Beam Angle	120°
Color temperature	4000 k
Consistency sdcm	<6
CRI	>80
Rated Lifetime	20000 h
Switch cycle	15000
Ta	25 °c
Safety Standard	IEC60598
Electrical Class	II
IP rating	20
EMC	/
EMF	/
EMI	/
Cutout	70 mm
Width	90 mm Ø
Height	27.5 mm
Weight	65 g
Dimming	No
Main Color of the luminaire	White
Color impact code (IK)	02

Photometric curve

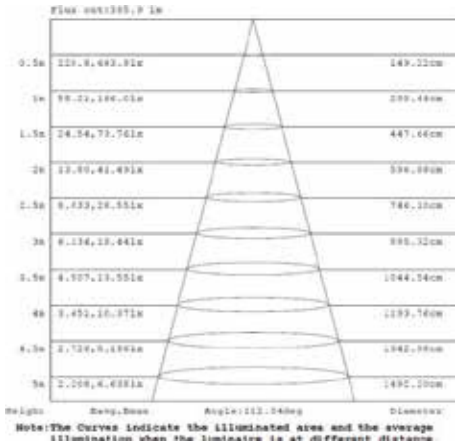

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

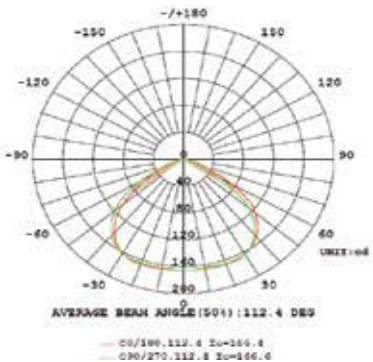

Planar Illuminance Curve

