

LED DOWN LIGHT

Economical Class




Super protection:

It is made of very safe materials,
so it is environmentally friendly
Provides flexibility in installation
and ease of installation


LED CHIP: SANAN SMD 3030




Photometric curve

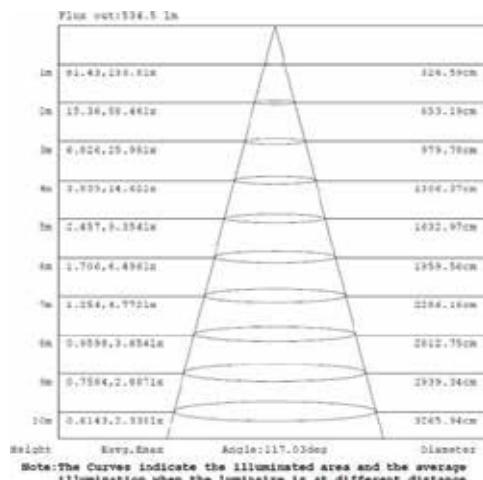

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

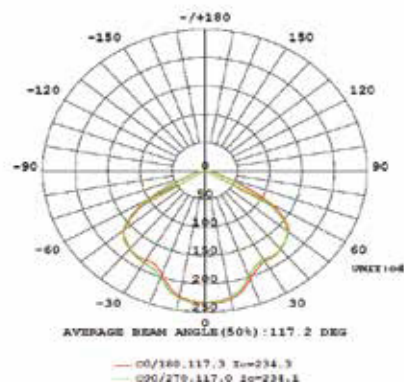

Planar Illuminance Curve

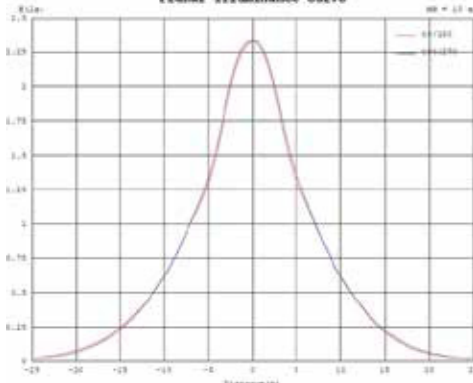

caption	the value
Rated wattage	8 w
Rated current	0.053 A
Rated voltage	220-240 V
Power Factor	50/60 Hz
Displacement Factor	0.7
Rated lumens	600 Lm
Efficiency	75 Lm/w
Lumen Maintenance	6000 h
Beam Angle	120°
Color temperature	6500 k
Consistency sdcm	<6
CRI	>80
Rated Lifetime	20000 h
Switch cycle	15000
Ta	25 °C
Safety Standard	IEC60598
Electrical Class	II
IP rating	20
EMC	/
EMF	/
EMI	/
Cutout	100 mm
Width	120 mm
Height	30 mm
Weight	120 g
Dimming	No
Main Color of the luminaire	White
Color impact code (IK)	02