

LED DOWN LIGHT

Economical Class




**Super protection:**  
It is made of very safe materials,  
so it is environmentally friendly  
Provides flexibility in installation  
and ease of installation

**LED CHIP: SANAN SMD 3030**



caption	the value
Rated wattage	15 w
Rated current	0.11 A
Rated voltage	220-240 V
Power Factor	50/60 Hz
Displacement Factor	0.9
Rated lumens	1200 Lm
Efficiency	80 Lm/w
Lumen Maintenance	6000 h
Beam Angle	<120°
Color temperature	6500 k
Consistency sdcm	<6
CRI	>80
Rated Lifetime	20000 h
Switch cycle	15000
Ta	25 °c
Safety Standard	IEC60598
Electrical Class	II
IP rating	20
EMC	/
EMF	/
EMI	/
Cutout	140 mm
Width	170 mm
Height	37 mm
Weight	250 g
Dimming	No
Main Color of the luminaire	White
Color impact code (IK)	02

Photometric curve

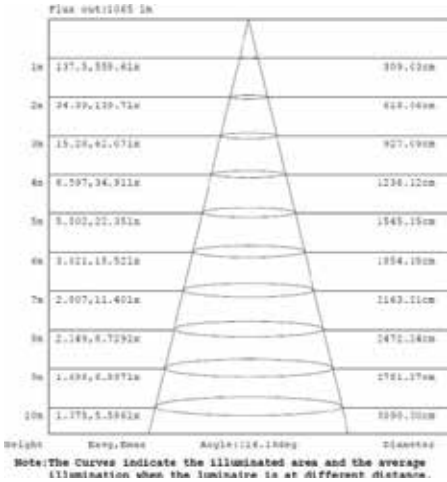

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

