

LED DOWN LIGHT

Economical Class




Super protection:
It is made of very safe materials,
so it is environmentally friendly
Provides flexibility in installation
and ease of installation

LED CHIP: SANAN SMD 3030



caption	the value
Rated wattage	30 w
Rated current	0.217 A
Rated voltage	220-240 V
Power Factor	50/60 Hz
Displacement Factor	0.9
Rated lumens	2400 Lm
Efficiency	80 Lm/w
Lumen Maintenance	6000 h
Beam Angle	<120°
Color temperature	4000 k
Consistency sdcm	<6
CRI	>80
Rated Lifetime	20000 h
Switch cycle	15000
Ta	25 °c
Safety Standard	IEC60598
Electrical Class	II
IP rating	20
EMC	/
EMF	/
EMI	/
Cutout	200 mm
Width	250 mm
Height	52.5 mm
Weight	470 g
Dimming	No
Main Color of the luminaire	White
Color impact code (IK)	02

Photometric curve

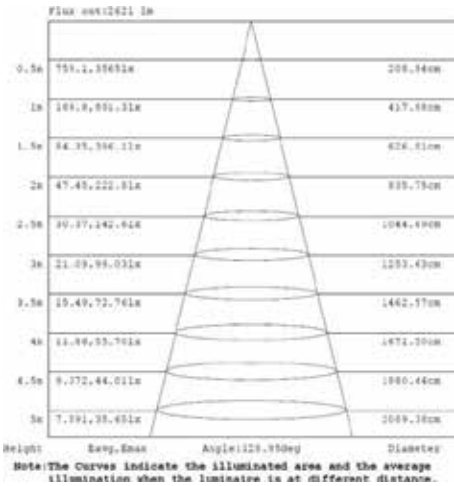

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

