

Model No:103052





**Super protection:**  
It is made of very safe materials,  
so it is environmentally friendly  
Provides flexibility in installation  
and ease of installation.  
LED by: **CTO**



| Caption                     | Value       |
|-----------------------------|-------------|
| Rated wattage               | 30 w        |
| Rated current               | 0.217 A     |
| Rated voltage               | 220-240V    |
| Power Factor                | 50/60 Hz    |
| Displacement Factor         | 0.9         |
| Rated lumens                | 2400 Lm     |
| Efficiency                  | 80 Lm/w     |
| Lumen Maintenance           | 6000 h      |
| Beam Angle                  | <120°       |
| Color temperature           | 6500 K      |
| Consistency sdcm            | <6          |
| CRI                         | >80         |
| Rated Lifetime              | 20000 h     |
| Switch cycle                | 15000       |
| Ta                          | 25 °c       |
| Safety Standard             | IEC 60598   |
| Electrical Class            | I           |
| IP rating                   | 20          |
| EMC                         | /           |
| EMF                         | /           |
| EMI                         | /           |
| Length                      | 200 ϕ       |
| Width                       | 230x55.5 mm |
| Height                      | 225 mm      |
| Weight                      | 0.5 Kg      |
| Dimming                     | No          |
| Main Color of the luminaire | White       |
| Color impact code (IK)      | 02          |

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

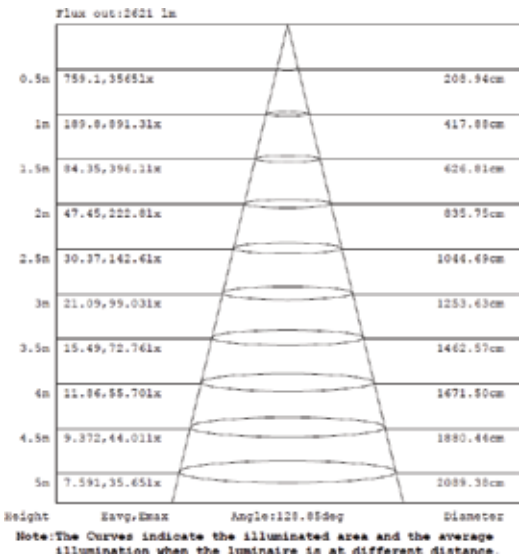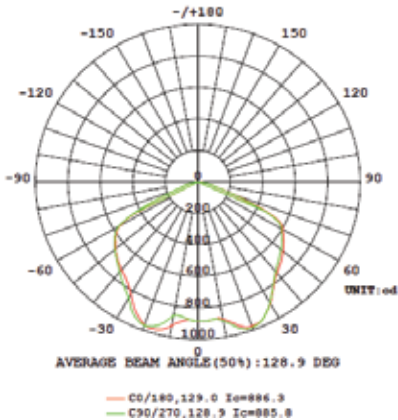

**Applications:**  
– Restaurant ,Shopping  
– Mall ,Hotel ,Home

**Features:**  
– Longevity beautiful, comfortable light ultra- efficient  
led lighting  
– Key features:  
– 80% energy savings  
– Eco-friendly.

