


### LED SURFACE MOUNTED

30 W 20 cm

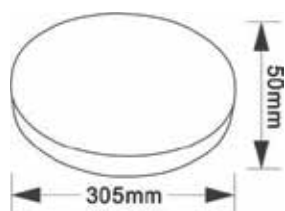


Caption	Value
Rated wattage	30 w
Rated current	0.126 A
Rated voltage	220-240V
Power Factor	50/60 Hz
Displacement Factor	0.9
Rated lumens	2310 Lm
Efficiency	77 Lm/w
Lumen Maintenance	6000 h
Beam Angle	°
Color temperature	3000 K
Consistency sdcm	< 6
CRI	> 80
Rated Lifetime	30000 h
Switch cycle	15000
Ta	40 °c
Safety Standard	IEC 60598
Electrical Class	II
IP rating	20
EMC	/
EMF	/
EMI	/
Length	230 mm
Width	230 mm
Height	50 mm
Weight	0.45 Kg
Dimming	No
Main Color of the luminaire	white
Color impact code (IK)	08

### BENEFITS :

- Unique optical distribution to highlight the inner frames or outer edges of windows, balconies or doors.
- Compact size.
- Light weight.

LED by: NEW LIGHTS

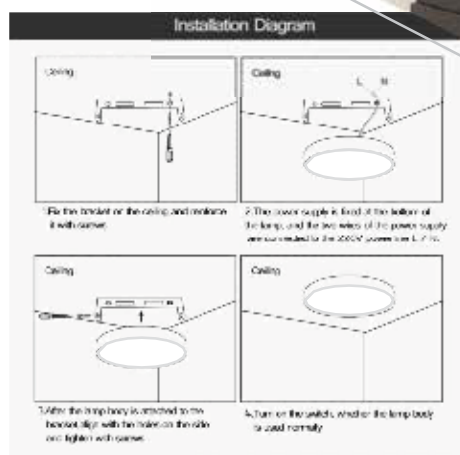

### Product benefits

- LED design for high product reliability
- Reduced windage area thanks to slim design
- Frosted cover made of tempered glass for uniform illumination
- Dust and water protection according to IP20

### Product features

- Architectural lighting
- Landscape lighting
- Billboard lighting
- Industrial and storage facilities