


Linear Turk Light SMD Black **30 watt**



caption	the value
Rated wattage	30 w
Rated current	0.25 - 0.49 A
Rated voltage	100-240 V
Line Frequency	50/60Hz
Displacement Factor	0.9
Rated lumens	2580 Lm
Efficiency	86 lm/W
Lumen Maintenance	6000 h
Beam Angle	90°
Color temperature	3000 k
Consistency sdcn	<6
CRI	>80
Rated Lifetime	30000 h
Switch cycle	15000
Ta	-10 ~ 40 °c
Safety Standard	IEC 60598
Electrical Class	II
IP rating	20
EMC	/
EMF	/
EMI	/
Length	393 mm
Width	34 mm
Height	57 mm
Weight	400 g
Dimming	No
Main Color of the luminaire	BLACK
Color impact code (IK)	02

1. Energy Savings
2. Eco-Friendly
3. High Brightness
4. Flexible Features
5. Lights Up Instantly
6. Less Heat Dissipation
7. Shock-Resistant
8. LED Ship

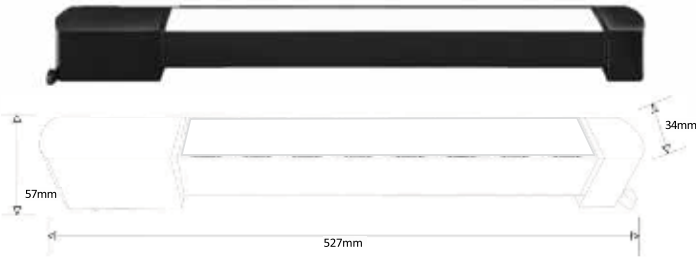

103091	Linear Turk Light smd Black Body 27cm 10w 3000K
103092	Linear Turk Light smd Black Body 27cm 10w 4000K
103093	Linear Turk Light smd Black Body 40cm 20w 3000K
103094	Linear Turk Light smd Black Body 40cm 20w 4000K
103095	Linear Turk Light smd Black Body 53cm 30w 3000K
103096	Linear Turk Light smd Black Body 53cm 30w 4000K