


LINEAR WALL WASHER

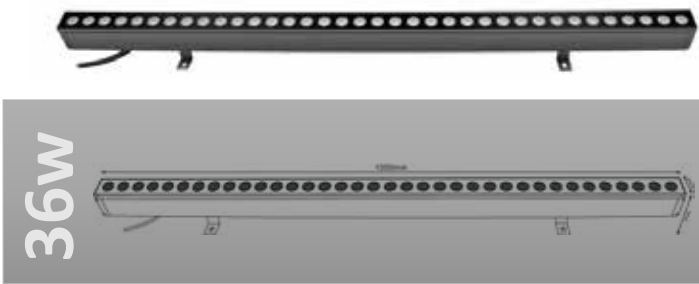

caption	the value
Rated wattage	36 w
Rated current	---
Rated voltage	220-240 V
Line Frequency	50/60Hz
Displacement Factor	>=0.9
Rated lumens	3900 Lm
Efficacy	108.33 Lm/w
Lumen Maintenance	6000 h
Beam Angle	26.5°
Color temperature	4000 k
Consistency sdc _m	<6
CRI	>80
Rated Lifetime	30000 h
Switch cycle	15000
T _a	-10 ~ 40 °c
Safety Standard	IEC 60598-1
Electrical Class	I
IP rating	65
EMC	/
EMF	/
EMI	/
Length	75 mm
Width	50 mm
Height	1000 mm
Weight	0.60 Kg
Dimming	No
Main Color of the luminaire	Grey
Color impact code (IK)	04

Product Benefits

- Visual comfort with maximum energy saving.
- Minimalist design with optimum performance.
- Quick & simple installation.
- Flexible deployment options with a wide spectrum of applications.



GREY

Model No:wwl-100cm-36w-SG-nw

LINEAR WALL WASHER LIGHT

Compact & Minimalist linear surface mounted luminaire designed for wall, ceiling & floor mount application. Ideal light distribution serves both wall washing & wall grazing applications.