

LINEAR LIGHT

40 watt


1. Energy Savings
2. Eco-Friendly
3. High Brightness
4. Flexible Features
5. Lights Up Instantly
6. Less Heat Dissipation
7. Shock-Resistant
8. LED Ship




caption	the value
---------	-----------

Rated wattage	40 w
Rated current	0.36 A
Rated voltage	220-240 V
Line Frequency	50/60Hz
Displacement Factor	0.9
Rated lumens	4600 Lm
Efficiency	115 Lm/w
Lumen Maintenance	6000 h
Beam Angle	N/A
Color temperature	3000 k
Consistency sdcn	<6
CRI	>80
Rated Lifetime	30000 h
Switch cycle	15000
Ta	-10 ~ 40 °c
Safety Standard	IEC 60598
Electrical Class	I
IP rating	20
EMC	/
EMF	/
EMI	/
Length	1200 mm
Width	55 mm
Height	65 mm
Weight	1500 g
Dimming	No
Main Color of the luminaire	MATT SILVER
Color impact code (IK)	02

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

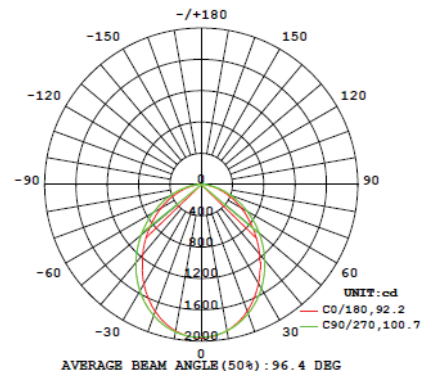

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

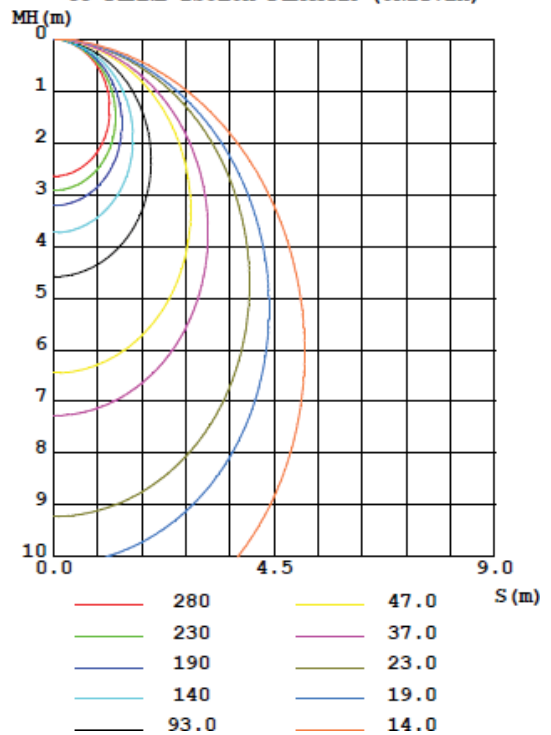

Suggested installation areas

