

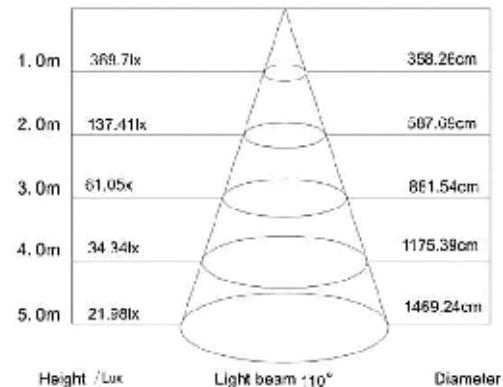
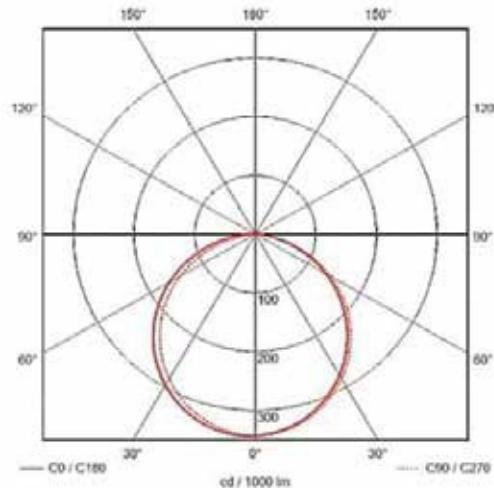
LED Floodlight DOB Dimension:


Caption	Value
Rated wattage	50 w
Rated current	38 m A
Rated voltage	220-240V
Power Factor	50/60 Hz
Displacement Factor	0.9
Rated lumens	5250 Lm
Efficiency	105 Lm/w
Lumen Maintenance	6000 h
Beam Angle	110°
Color temperature	4000K
Consistency sdcm	<6
CRI	>80
Rated Lifetime	30000 h
Switch cycle	15000
Ta	-10~40 °C
Safety Standard	IEC 60598
Electrical Class	I
IP rating	65
EMC	/
EMF	/
EMI	/
Length	230 mm
Width	30 mm
Height	165 mm
Weight	0.5 Kg
Dimming	No
Main Color of the luminaire	GREY
Color impact code (IK)	08

Super protection:

It is made of very safe materials, so it is environmentally friendly. Provides flexibility in installation and ease of installation.

LED by: 


Photometric curve

Product benefits

- LED design for high product reliability
- Reduced windage area thanks to slim design
- Frosted cover made of tempered glass for uniform illumination
- Dust and water protection according to IP65

Product features

- Architectural lighting
- Landscape lighting
- Billboard lighting
- Industrial and storage facilities