

ITEM NO : 107381

120P

caption	the value
Rated wattage	12 W/m
Rated current	2.7 A
Rated voltage	220-240V
Frequency	50/60 Hz
Power Factor	≥ 0.9
Rated lumens	920 Lm/m
Efficiency	76.66 Lm/w
Lumen Maintenance	6000h
Beam Angle	120 °
Color temperature	3000 k
Consistency sdcn	<3
CRI	> 70
Rated Lifetime	15000 h
Switch cycle	7500
Ta	45 °c
Safety Standard	IEC 60598
Electrical Class	II
IP rating	65
CHIP QTY/M	120
EMF	/
EMI	/
Cutout	20 mm
Width	6.5 mm
Height	13.8 mm
Roll Length	50 M
Dimming	No
Main Color of the luminaire	clear
Color impact code (IK)	08


Areas of application

- General indoor illumination
- General outdoor illumination
- Decorative illumination
- Private living areas




Super protection:

It is made of very safe materials, so it is environmentally friendly
Provides flexibility in installation and easy of installation

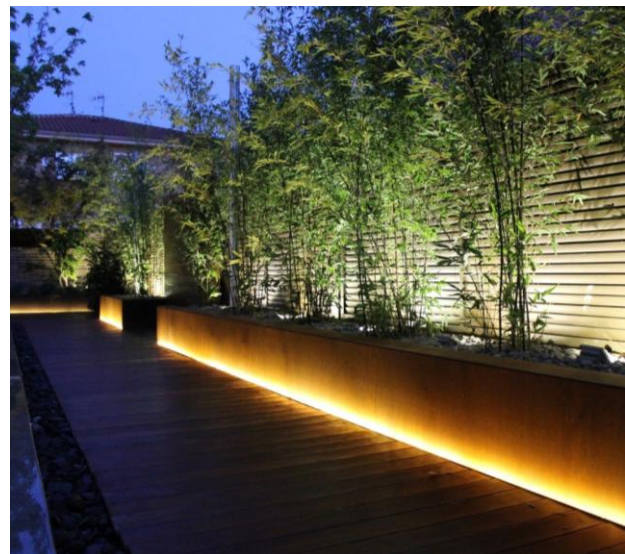

Product benefits

- Great scope of design options due to long and flexible LED strips
- Easy mounting on many smooth surfaces thanks to self-adhesive tape
- Suitable for use in damp conditions thanks to high type of protection
- Maximum flexibility due to large range of accessories
- Simple connection thanks to integrated cables on both sides



Minimum cut size
200mm

