

HUMAN PRESENCE SENSOR WITH BREATHING DETECTION

2000W SURFACE

WHITE

-It is recommended to install it at a height of 2-4 meters.

-With detection display in test mode.

-Ceiling installation using integrated spring bracket.

-Rated voltage: 110-240V~, +10 % / -10 %

-Rated frequency: 50/60 Hz

-Suitable for: 230 V incandescent lamps

-Rated power: **2000W**

-Rated Load: Max.

2000W (220-240V/AC)

1000W (110-130V/AC)

1000W (220-240V/AC)

500W (110-130V/AC)

-Suitable for: Energy-saving bulbs

-Suitable for: Fluorescent lamps

-Protection class (Device): IP 20


-Temperature range (Device): -20 °C - +40 °C

-Detection angle: 360 °

-Dimensions: (L x W x D): 115 mm x 115 mm x 22 mm

-Mounting depth: 44 mm

-Mounting height: 2-4 m

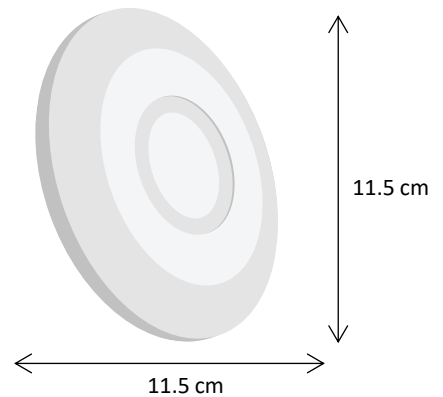

-For switching lighting systems that depend on brightness and movement.

-Easy to install.

-Electric power saver.

-Suitable for home and commercial use.

-It is used as a lighting sensor in ceilings and entrance halls.

-For semiautomatic and fully automatic operation. Additional activation/deactivation possibility through pushbutton input.


-Detection range (for installation height of 4 m), circular, up to 6 m in diameter.

-Adaptation of the detection range possible using the included masking elements.

-With brightness-independent test mode for evaluating the detection zone.



Photometric curve



Areas of application

Suitable for – indoor applications

- Offices
- Corridors
- Stairways
- Residential interiors
- Commercial buildings

