


## LED PANEL LIGHT 72W

MODEL NO:101075

| caption                     | the value   |
|-----------------------------|-------------|
| Rated wattage               | 72 w        |
| Rated current               | 0.36 A      |
| Rated voltage               | 220-240 V   |
| Line Frequency              | 50/60Hz     |
| Displacement Factor         | 0.9         |
| Rated lumens                | 7100 Lm     |
| Efficiency                  | 98.61 Lm/w  |
| Lumen Maintenance           | 6000 h      |
| Beam Angle                  | 120°        |
| Color temperature           | 6500 k      |
| Consistency sdcm            | <6          |
| CRI                         | >80         |
| Rated Lifetime              | 50000 h     |
| Switch cycle                | 25000       |
| Ta                          | -10 ~ 45 °c |
| Safety Standard             | IEC 60598   |
| Electrical Class            | II          |
| IP rating                   | 20          |
| Cutout                      | 60*60       |
| Width                       | 595 mm      |
| Height                      | 595 mm      |
| Weight                      | 1530 g      |
| Dimming                     | No          |
| Main Color of the luminaire | White       |
| Color impact code (IK)      | 02          |



595\*595mm

1. Energy Savings
2. Eco-Friendly
3. High Brightness
4. Flexible Features
5. Lights Up Instantly
6. Less Heat Dissipation
7. Shock-Resistant




IP 20



RoSH

CRI >80

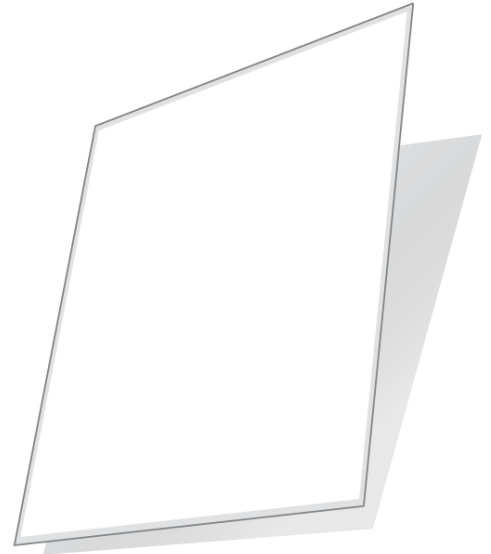

### DRIVER x2

### NOBOMBS® LED Power Supply

Model:ZF-NEH040S0900FFH

Constant Current Type for LED Modules only

|               |                    |
|---------------|--------------------|
| Un: 220-240V~ | Prated: 36W        |
| In: 0.19A     | Output: 24-40V --- |
| Freq: 50/60Hz | Uout: Max 55V ---  |
| PF: 0.9       | Iout: 900mA        |

ta:45°C tc:85°C

Rated Efficiency > 90%

### INSTRUCTIONS

