

SMART SWITCH WI-FI

2Gang 1Way




caption	the value
Rated Load	MAX 700W/GAN
Rated voltage	100-250V
Frequency	50/60Hz
Conductor Size	4 mm
Screw Terminal	Steel
Contact Material	Copper
Enclosure Material	Plastic
Wireless Standard	IEEE 802.11
Humidity	%80≥
Ta	-10~+45°C
Safety Standard	60669-2-3
Size	36 mm
Width	86 mm
Height	86 mm
Wireless Type	WI-FI
Main Color of the luminaire	Black
Backlight	Red

Super protection:

NEWPOWER Smart Switch is a high-quality, modern smart switch designed for seamless home automation. With advanced wireless connectivity options, it allows users to control their appliances remotely through a smartphone. Its sleek glass panel design and multiple color options ensure it complements any home decor.

Glass

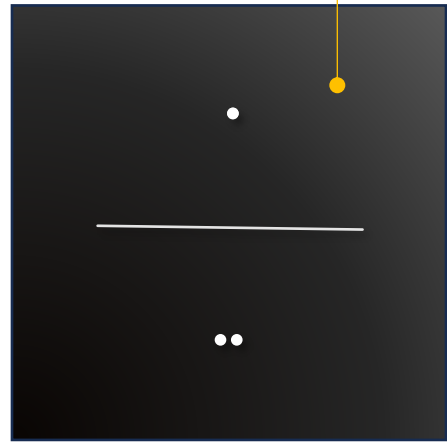

Installation

Warning: make sure you have totally cut off the power supply for the wall switch you are replacing.

- Firstly, remove the old switch from wall box.
- As shown in these diagrams below, insert wires into the corresponding terminal holes and fasten them. For different models, the terminal positions are not the same, follow the sign on the product to connect the wires.
- After connecting the wires, use a screwdriver to open the panel. Then use two screws to fix the back enclosure into the wall box and cover the panel.

• Diagram for switch with neutral wire

• Diagram for heater /AC switch

• Diagram for Fan lamp switch

• Diagram for Dimer switch

• Diagram for wired scene switch

• No need wiring for wireless scene switch

LED Indicator

Remark: for different products, the icon and the color & position of LED indicator are different for different models, please be subject to the actual products.

Long press any one of the switch button,
 *The LED indicator blinks: pairing mode for add device to APP.
 Blink rapidly (Default/Smart Mode for pairing) or blink slowly (AP Mode for pairing), then follow the instructions in APP to add the device to APP.
 *The LED indicator solid: the device is successfully connected to APP.
 *The status of LED indicator can be adjusted in APP.

LED Indicator

Remark: for different products, the icon and the color & position of LED indicator are different for different models, please be subject to the actual products.

Long press any one of the switch button,
 *The LED indicator blinks: pairing mode for add device to APP.
 Blink rapidly (Default/Smart Mode for pairing) or blink slowly (AP Mode for pairing), then follow the instructions in APP to add the device to APP.
 *The LED indicator solid: the device is successfully connected to APP.
 *The status of LED indicator can be adjusted in APP.

Add Device to APP

- Download the Smart Life APP. Scan the following QR Code or search "Smart Life" in APP Store or Google Play.
- Preparations before get started
 - For WiFi switch**
A networkable WiFi router is required, the WiFi switches only supports 2.4GHz WiFi network, don't support 5G.
 - For ZigBee/Bluetooth switch**
A ZigBee/Bluetooth gateway is required, the ZigBee/Bluetooth gateway should be successfully configured before pairing ZigBee/Bluetooth switches.
- Power on the wall switch, then press and long hold the button for about round 5-8 seconds until the LED indicator blinks to enter into pairing mode, then follow the below setup wizard for adding.

4. The next steps are different for different protocol switches, please note it.

• **For WiFi switch**
 I. Open the APP Smart Life, home page, Tap the icon "+" on the top right into Add Manually, then Tap Electrical->Switch Enter into "Add Device".
 II. Tap the related button in application, choose the local WiFi and input SSID & password. If no password, keep it blank, then tap "Confirm".
 III. Wait for configuring successfully, then tap "Complete".

• **For ZigBee/Bluetooth switch**
 I. Tap "+" > Electrical->Switch(ZigBee)/Switch (Bluetooth) into Add Device.
 II. Select the ZigBee/Bluetooth gateway and follow the prompts.
 III. Wait for configuring successfully, then tap "Complete".

Connect with Voice Services

Please refer to the guidance in the APP, here below are the steps:
 First page >> Me >> More Services >> Voice Services