





THE  
THINNEST  
you'll ever **see**

this newpower product Has good contact inside, assuring good electrical conductivity & safety use. It has a stylish modern, slim profile.

AVAILABLE IN  
MATTE BLACK,  
DARK GRAY  
WHITE

DESCRIPTION	DETAILS
Product Description	NEWPOWER SIZE 7X7 <b>1GANAG 13A SOCKET</b> With (double pole) switch
Product Catalog No.	2002
Standard	SASO 2203:2018 BS 1363-2
Rated Current	13A
Rated Voltage	250V AC
Frequency	50 / 60 Hz
Product Dimensions	86 x 87 x 31 mm
Accessories	Mounting screws - 2 x M3.5
Mounting	Flush Mounting
Fixing Center	60.3 mm
Auxiliary fixing options	4 Corners
Mounting box size	35 mm
Actuating member	Rocker
Endurance	15,000
Enclosure Material	PC
Contact material	Copper
Terminal for current carrying part	Red copper 99.9%
Screw terminal	Steel
Terminal Identifier	L, N & E
Conductor size	2.5 mm <sup>2</sup>
Terminal Capacity	4 x 2.5 mm <sup>2</sup> 3 x 4 mm <sup>2</sup>
Tightening torque	2.0 Nm
Screw size	M5

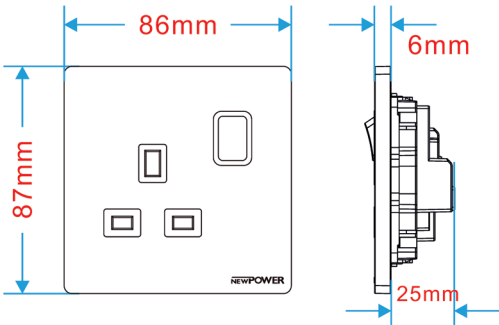

Contact Moving-For the 13A BS socket with DP (Double Pole) switch, the moving contacts of the switch are made of red copper (99% Cu), coated with a silver belt.-The same copper and silver belt construction is used for the 20A DP switch and 45A DP switch.-The red copper and silver belt combination provides very good electrical conductivity, which can reduce heat generation when running at high currents.

